



## VIVO QUADRA DECKENLEUCHE



Extrem flache (54mm) Decken- oder Wandleuchte inklusiv dem bewährtem Vivo Quadra Downlight. Gehäuse aus weiß (RAL 9010) lackiertem Aluminium. Die sehr hohe Qualität der Epistar LEDs ermöglichen einen CRI-Wert von 90. Eine spezielle Kombination aus dreischichtigem Diffusor ermöglichen eine gleichmäßige Lichtverteilung mit einem Strahlwinkel von 150°. Standardmäßig in warmweiß (3000K) und neutralweiß (4000K) erhältlich. Ideal einsetzbar in Korridoren, Meetingräumen, Büros und Hotels. Inklusiv 32V Trafo, Anschluss an 100-240V AC. Schnelle und einfache Montage.

Extremely shallow square surface mounted LED downlight (54mm) with white painted aluminium housing (RAL 9010). Very high quality Epistar LEDs with high colour rendering (CRI 90). A special combination of three layered diffusers for even light distributions with 150° angle. Standard available in warm white (3000k) and neutral white (4000k). Very suitable in corridors, meeting rooms, offices and hotels. Including 32V driver with European 2-pole plug. Direct connection to mains 100-240V AC. Low maintenance. Life expectancy 40.000 hours. Fast and easy mounting.

Bezeichnung	Watt	Lichtfarbe	Lumen	Größe	Ampere (mA)	Gewicht	Artikelnummer
VIVO QUADRA	17Watt	3000K	820lm	172x172mm	700	2,00kg	<b>1300791</b>
VIVO QUADRA	25Watt	3000K	1170lm	226x226mm	700	2,50kg	<b>1300792</b>
VIVO QUADRA	33Watt	3000K	1580lm	276x276mm	1050	2,80kg	<b>1300793</b>
VIVO QUADRA	17Watt	4000K	890lm	172x172mm	700	2,00kg	<b>1300795</b>
VIVO QUADRA	25Watt	4000K	1270lm	226x226mm	700	2,50kg	<b>1300796</b>
VIVO QUADRA	33Watt	4000K	1710lm	276x276mm	1050	2,80kg	<b>1300797</b>

Höhe der Leuchte: 54mm, Gehäusefarbe weiß, CRI 90, IP50, inklusiv 32V Driver, Notstrom 1/3 Stunden  
2700K und 6000K auf Anfrage

### VIVO QUADRA Aufputzleuchte 1-10V dimmbar

Bezeichnung	Watt	Lichtfarbe	Lumen	Größe	Ampere (mA)	Gewicht	Artikelnummer
VIVO QUADRA	17Watt	3000K	820lm	172x172mm	700	2,00kg	<b>1300791D</b>
VIVO QUADRA	25Watt	3000K	1170lm	226x226mm	700	2,50kg	<b>1300792D</b>
VIVO QUADRA	33Watt	3000K	1580lm	276x276mm	1050	2,80kg	<b>1300793D</b>
VIVO QUADRA	17Watt	4000K	890lm	172x172mm	700	2,00kg	<b>1300795D</b>
VIVO QUADRA	25Watt	4000K	1270lm	226x226mm	700	2,50kg	<b>1300796D</b>
VIVO QUADRA	33Watt	4000K	1710lm	276x276mm	1050	2,80kg	<b>1300797D</b>

### VIVO QUADRA Aufputzleuchte DALI TOUCH DIM


Bezeichnung	Watt	Lichtfarbe	Lumen	Größe	Ampere (mA)	Gewicht	Artikelnummer
VIVO QUADRA	17Watt	3000K	820lm	172x172mm	700	2,00kg	<b>1300791DT</b>
VIVO QUADRA	25Watt	3000K	1170lm	226x226mm	700	2,50kg	<b>1300792DT</b>
VIVO QUADRA	33Watt	3000K	1580lm	276x276mm	1050	2,80kg	<b>1300793DT</b>
VIVO QUADRA	17Watt	4000K	890lm	172x172mm	700	2,00kg	<b>1300795DT</b>
VIVO QUADRA	25Watt	4000K	1270lm	226x226mm	700	2,50kg	<b>1300796DT</b>
VIVO QUADRA	33Watt	4000K	1710lm	276x276mm	1050	2,80kg	<b>1300797DT</b>

#### Remark:

Dali/Touch dim i.c.w. 15w and 21w results in 15% lower lumen and power use  
Colour temperature can vary max. +10%

#### Features

Low reactive power (Cos Phi >0,99)  
High efficiency power supply (>85%)  
2700k or 6000k available on request

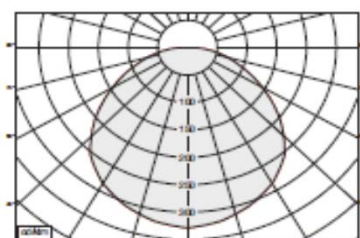

**EPISTAR**